



SERIE PA

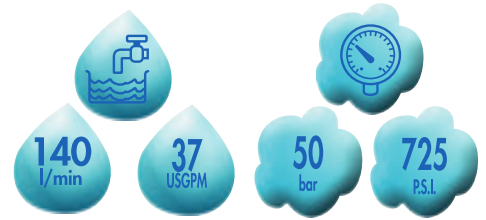

PA 144

43.7200.97.3 - VD

Pompa a 4 membrane-pistone semidrauliche.
 Four piston semi-hydraulic diaphragm pump.
 Pompe à 4 piston-membranes semi-hydrauliques.
 Bomba de 4 membranas- pistón semi-hidráulicas.

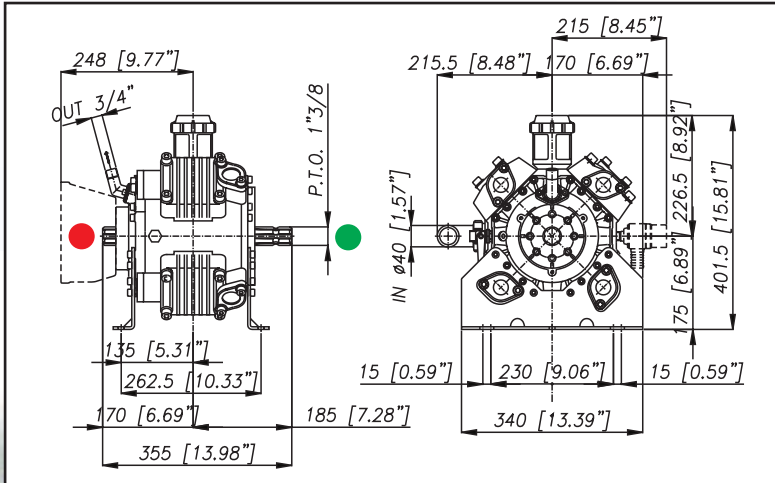

Caratteristiche tecniche
 Specifications
 Caractéristiques techniques
 Características técnicas

Mod.
PA 144

g/min; R.P.M.; t/min; rev./min.	g/min	R.P.M.	550	550	
Potenza - Power - Puissance - Potencia	KW	HP	13,3	17,7	
Peso - Weight - Poids - Peso	Kg	lb	36	79	
Dislivello aspirazione Negative pressure Pression négative Presión negativa	MAX	mt	ft	1,5	4,9
		mt	ft	3	9,8
Aspirazione - Ø Intake - Aspiration - Aspiración	mm	in	40	1 9/16	
Mandata - Ø High pressure - Refoulement - Presión	mm	in	G.3/4	G.3/4	
Temperatura - MAX Temperature - Température - Temperatura	°C	°F	60	140	
Tipo olio - Oil type - Type Huile - Tipo aceite	SAE	W	SAE 30	30 W	
Capacità olio - Oil capacity - Capacité huile - Capacidad aceite	lt	U.S.G.	1,25	0,33	

VERSIONI CON BIELLA IN BRONZO

BRONZE CONNECTING RODS VERSIONS
 VERSIONS BIELLES EN BRONZE
 VERSIONES CON BIELLA DE BRONCE

43.7620.97.3 VD

TABELLA RENDIMENTI - PERFORMANCE CHART

TABLEAU DES PERFORMANCES - TABLA DE RENDIMIENTOS



PA 144		g./min. - R.P.M. - t/min. - rev./min.							
		400		450		500		550	
BAR	P.S.I.	L/min	KW	L/min	KW	L/min	KW	L/min	KW
		USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2	29	101,8	0,4	114,5	0,4	127,3	0,5	140	0,5
		26,9	0,4	30,3	0,6	33,6	0,7	37,0	0,7
20	290	100,7	4	113,2	4,4	125,8	4,9	138,4	5,4
		26,6	5,3	29,9	5,9	33,2	6,6	36,6	7,3
40	580	99,1	7,8	111,4	8,8	123,8	9,7	136,2	10,7
		26,2	10,4	29,4	11,7	32,7	13,0	36	14,3
50	725	98,3	9,6	110,5	10,9	122,8	12,1	135,1	13,3
		26	12,9	29,2	14,5	32,4	16,1	35,7	17,7



ALBERO POMPA • PUMP SHAFT • ARBRE POMPE • CIGÜEÑAL BOMBA



ANT.- FRONT
 AVANT - ANTERIOR



POST.- REAR
 ARRIÈRE - POSTERIOR

